

# Red Point Source LED Chip MED7P4

MED7P4 is a red point source LED chip with a track-shaped emitting aperture. MED7P4 is well suited for optical switches and other light source applications due to its high output power, high reliability and uniform optical power distribution.

## • Features

- Track-shaped emitting aperture ( $\phi 150 \times 40 \mu\text{m}$ )
- High output power
- High reliability


## • Structure

- Material: AlInGaP/GaAs sub.
- Electrode: Au alloy (p,n)
- Emitting surface: p-side

## • Applications

- Optical switches
- Optical sensors
- POF communications etc

## • Dimensional outline drawing ( $\mu\text{m}$ )

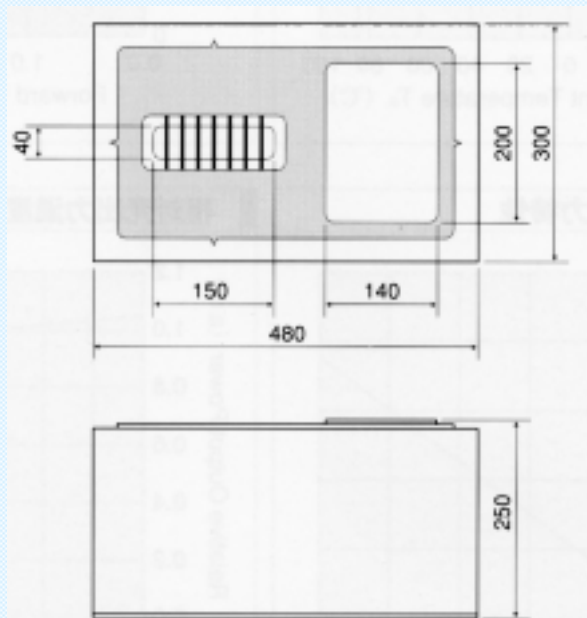

## • Absolute Maximum Ratings\* ( $T_a=25^\circ\text{C}$ )

Parameter	Symbol	Rating	Unit
Power Dissipation	$P_D$	65	mW
Forward Current	$I_F$	25	mA
Reverse Voltage	$V_R$	3	V
Operating Temperature	$T_{opr}$	-40 ~ 85	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-40 ~ 100	$^\circ\text{C}$

## • Electro-Optical Characteristics\* ( $T_a=25^\circ\text{C}$ )

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	$V_F$	$I_F=20\text{mA}$	-	2.4	3.0	V
Reverse Current	$I_R$	$V_R=3\text{V}$	-	-	10	$\mu\text{A}$
Output Power	$P_o$	$I_F=20\text{mA}$	0.3	0.6	-	mW
Peak Wavelength	$\lambda_p$	$I_F=20\text{mA}$	630	650	670	nm

\* as mounted on TO18 header and hermetically sealed

# Star LED



Daido Steel Co., Ltd.

MED7P4 data sheet

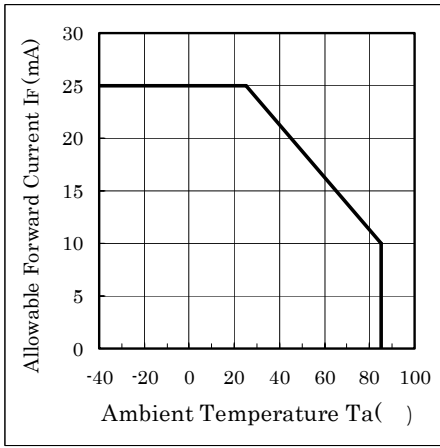


Fig1.  $I_F / T_a$

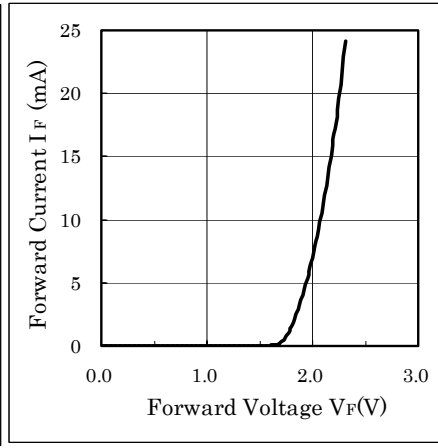


Fig2.  $I_F / V_F$

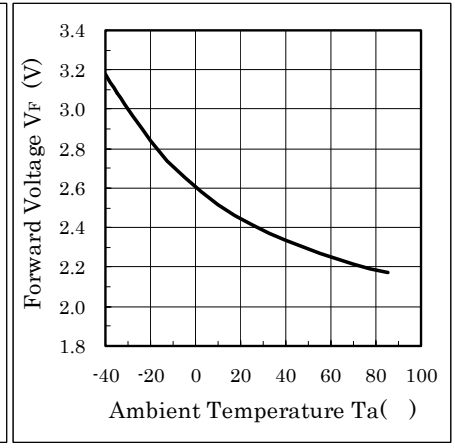


Fig3.  $V_F / T_a$

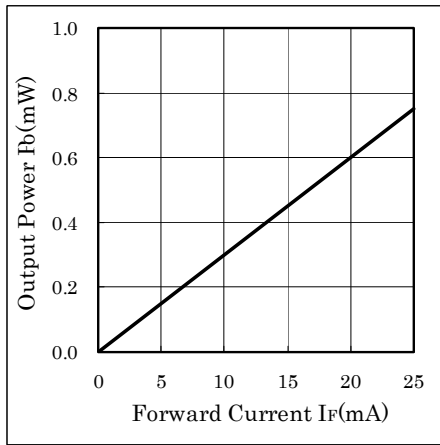


Fig4.  $P_o / I_F$

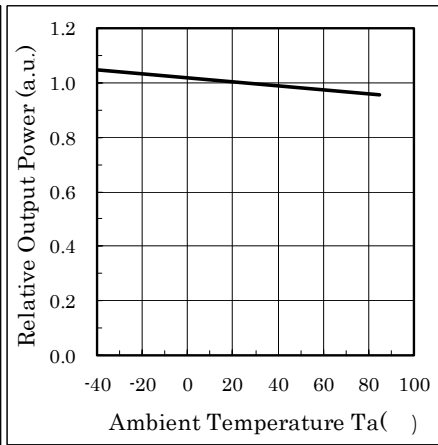


Fig5. Relative  $P_o / T_a$

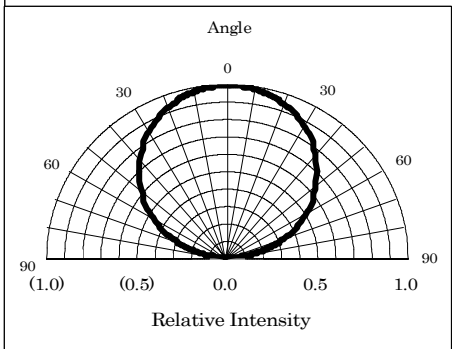


Fig6. Spatial Distribution

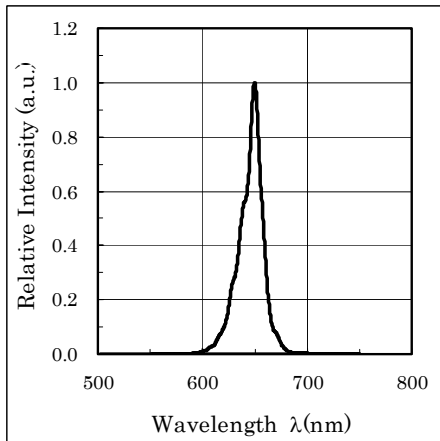


Fig7. Spectral Characteristics

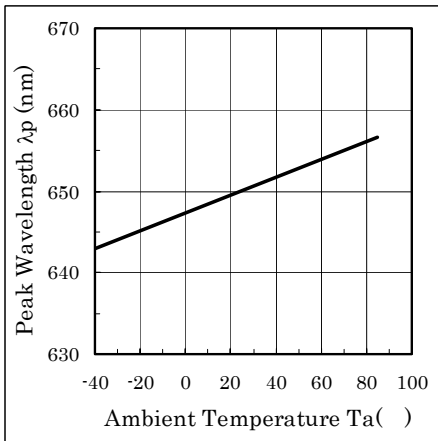


Fig8. Peak Wavelength /  $T_a$

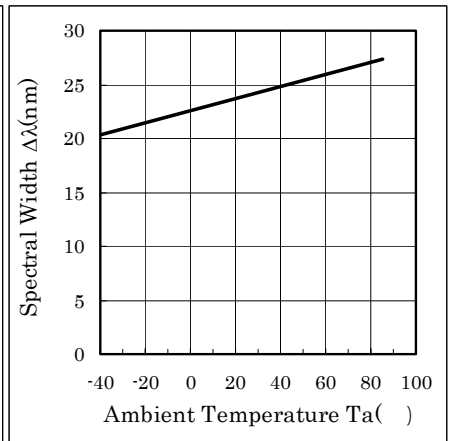


Fig9. Spectral Width /  $T_a$

This catalogue was compiled in September 2003. All items listed in the catalogue are subject to change without any prior notice.

Products listed in this catalogue are manufactured for use in standard applications (eg: household appliances, OA/AV, telecommunications, measurement instruments). Please do not use the products in critical reliability and security applications (eg: space and aviation, critical-safety transport applications, nuclear power control, medical, life-supporting units and equipment).



**DAIDO STEEL Co., Ltd.**

New Business Development Center

6-35, Konan 1-chome, Minato-ku, Tokyo 108-8478, Japan

TEL:+81 3 5495 1255 FAX:+81 3 5495 6734 URL:<http://www.daido.co.jp>