

Red Point Source LED Chip MED7P6

MED7P6 is an AlInGaP red point source LED chip having a small emitting aperture. It is designed for optical communications over Plastic Optical Fiber (POF) and is also well suited for applications where small visible light is required, such as sensing and positioning.

• Features

- Red light emission (λ_p : 650nm)
- Small emitting aperture ($\phi 80\mu\text{m}$)
- High speed (f_c : 45MHz)
- High reliability


• Structure

- Material: AlInGaP/GaAs sub.
- Electrode: Au alloy (p,n)
- Emitting surface: p-side

• Applications

- POF communications
- Optical sensors etc.

• Dimensional outline drawing (μm)

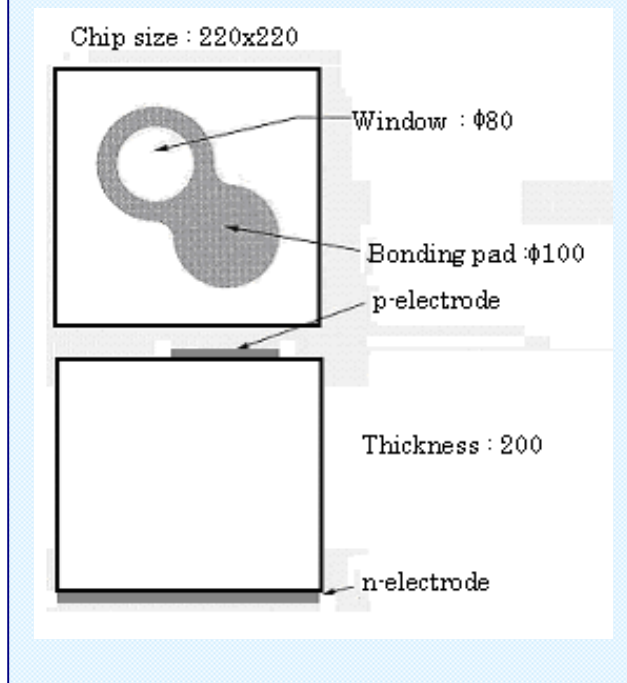

• Absolute Maximum Ratings* ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Maximum rating	Unit
Power Dissipation	P_D	65	
Forward Current	I_F	25	mA
Reverse Voltage	V_R	3	V
Operation Temperature	T_{opr}	-40 ~ 85	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 ~ 100	$^\circ\text{C}$

• Electro-Optical Characteristics* ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F=20\text{mA}$	-	2.4	3.0	V
Reverse Current	I_R	$V_R=5\text{V}$	-	-	10	μA
Output Power	P_o	$I_F=20\text{mA}$	0.25	0.45	-	mW
Peak Wavelength	λ_p	$I_F=20\text{mA}$	630	650	670	nm
Cutoff Frequency	f_c	$I_F=20\text{mA}+10\text{mA}_{p-p}$	-	45	-	MHz

* as mounted on TO18 header and hermetically sealed

Star LED



Daido Steel Co., Ltd

MED7P6 data sheet

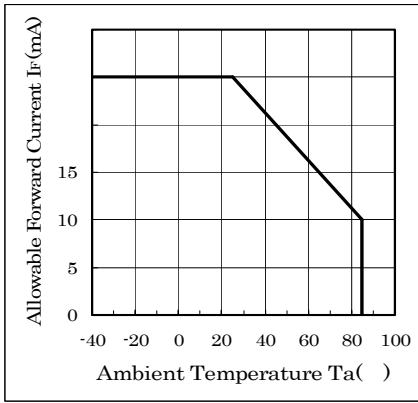


Fig1. I_F / T_a

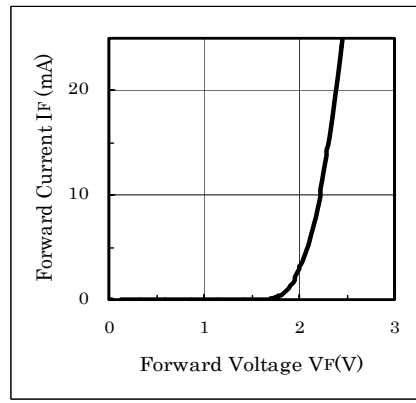


Fig2. I_F / V_F

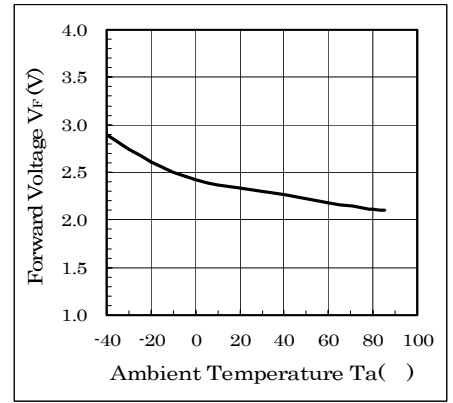


Fig3. V_F / T_a

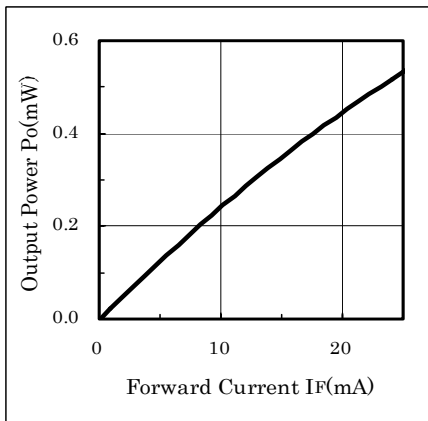


Fig4. P_o / I_F

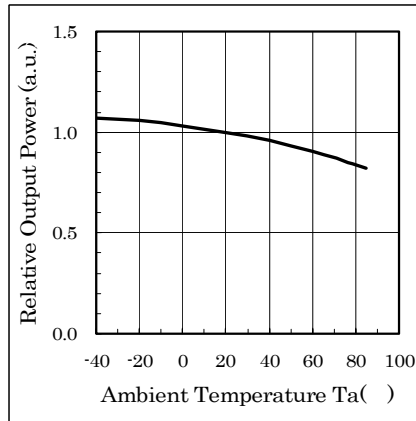


Fig5. Relative P_o / T_a

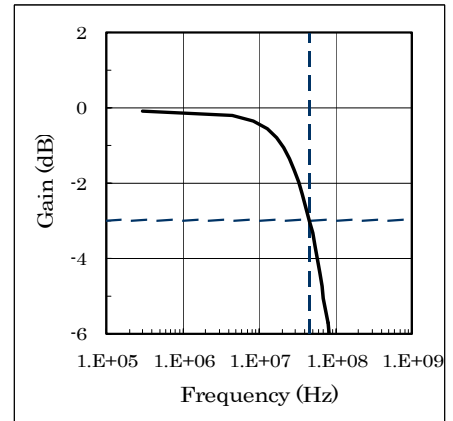


Fig6. Frequency Response

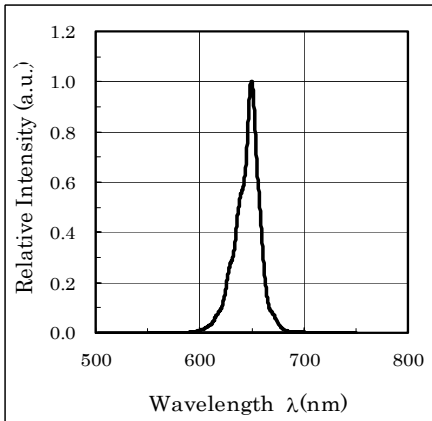


Fig7. Spectral Characteristics

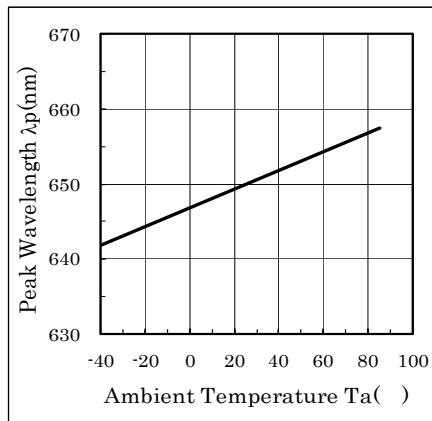


Fig8. Peak Wavelength / T_a

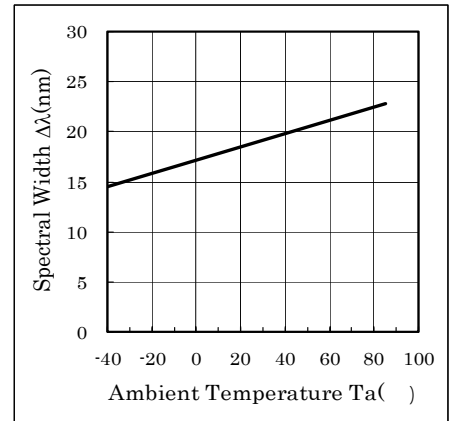


Fig9. Spectral Width / T_a

This catalogue was compiled in September 2004. All items listed in the catalogue are subject to change without any prior notice.

Products listed in this catalogue are manufactured for use in standard applications (eg: household appliances, OA/AV, telecommunications, measurement instruments). Please do not use the products in critical reliability and security applications (eg: space and aviation, critical-safety transport applications, nuclear power control, medical, life-supporting units and equipment).



DAIDO STEEL Co., Ltd.
 New Business Development Center
 6-35, Konan 1-chome, Minato-ku, Tokyo 108-8478, Japan
 TEL:+81 3 5495 1255 FAX:+81 3 5495 6734 URL:<http://www.daido.co.jp>