

MED8P54 is a low failure infrared point source LED chip. It is well suited for optical switches, positioning and sensing applications due to its small-size emitting aperture.

Features

- Small-size emitting aperture ($\phi 150\mu\text{m}$)
- High output power
- High reliability


Structure

- Material: AlGaAs/GaAs sub.
- Electrode: Au alloy (p,n)
- Emitting surface: p-side

Applications

- Optical encoders
- Optical switches
- Optical sensors etc

Dimensional outline drawing(μm)

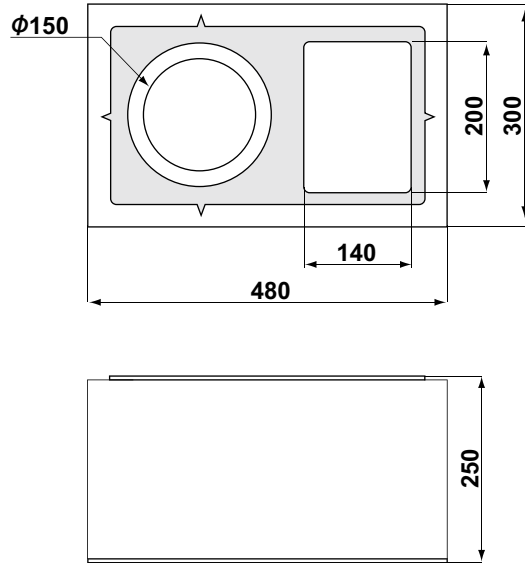

Absolute Maximum Ratings* ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Rating	Unit
Power Dissipation	P_D	200	mW
Forward Current	I_F	100	mA
Reverse Voltage	V_R	3	V
Operating Temperature	T_{opr}	-20~80	$^\circ\text{C}$
Storage Temperature	T_{stg}	-30~100	$^\circ\text{C}$

Electro-Optical Characteristics* ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F=50\text{mA}$	-	1.7	2.2	V
Reverse Current	I_R	$V_R=3\text{V}$	-	-	10	μA
Output Power	P_o	$I_F=50\text{mA}$	1.5	2.4	-	mW
Central Emission Wavelength	λ_c	$I_F=50\text{mA}$	-	855	-	nm
Cutoff Frequency	f_c	$I_F=50\text{mA}+20\text{mA p-p}$	-	25	-	MHz

*As mounted on T018 header and hermetically sealed

Fig1. I_F / T_a

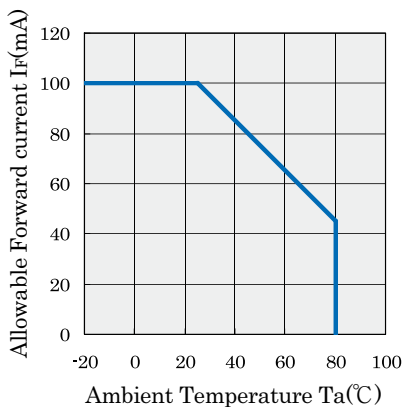


Fig2. I_F / V_F

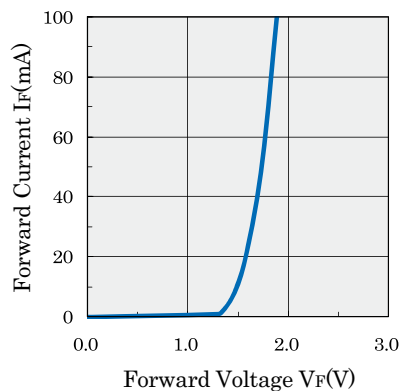


Fig3. V_F / T_a

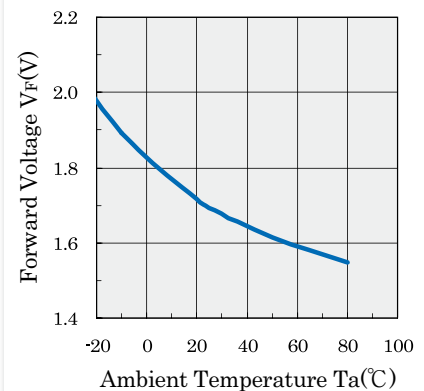


Fig4. P_O / I_F

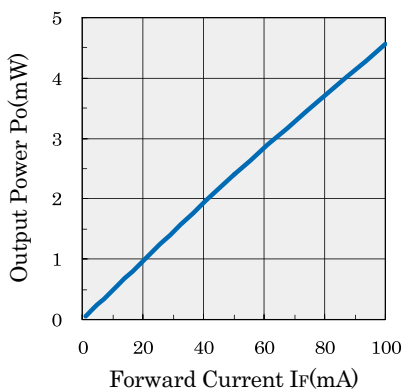


Fig5. Relative P_O / T_a

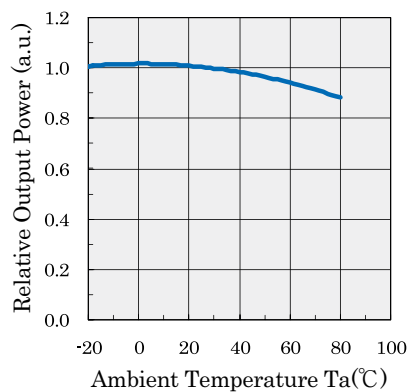


Fig6. Frequency Response

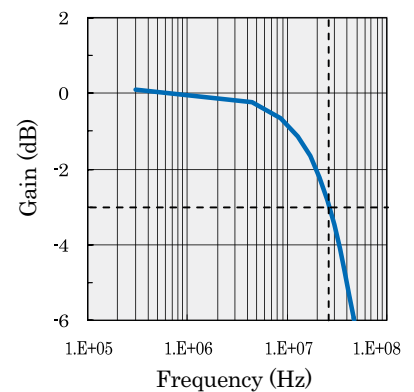


Fig7. Spectral Characteristics

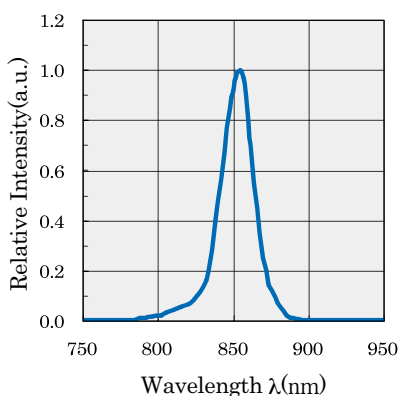


Fig8. Central Wavelength λ_c / T_a


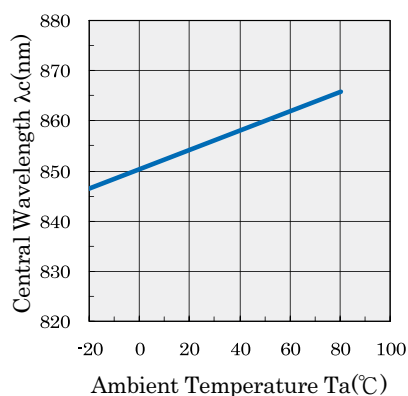


Fig9. Spectral Width $\Delta\lambda / T_a$

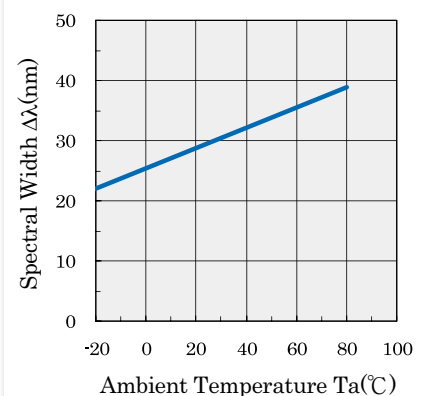

This catalogue was compiled in October 2012. All items listed in the catalogue are subject to change without any prior notice.

Products listed in this catalogue are manufactured for use in standard applications (eg: household appliances, OA/AV, telecommunications, measurement instruments). Please do not use the products in critical reliability and security applications (eg: space and aviation, critical-safety transport applications, nuclear power control, medical, life-supporting units and equipment).